


Another bit of concrete next.



Disconnect the powder-and-water inlet from the drum. A small screwdriver eases the inner serrated tongue out sideways from the serrated jaws.

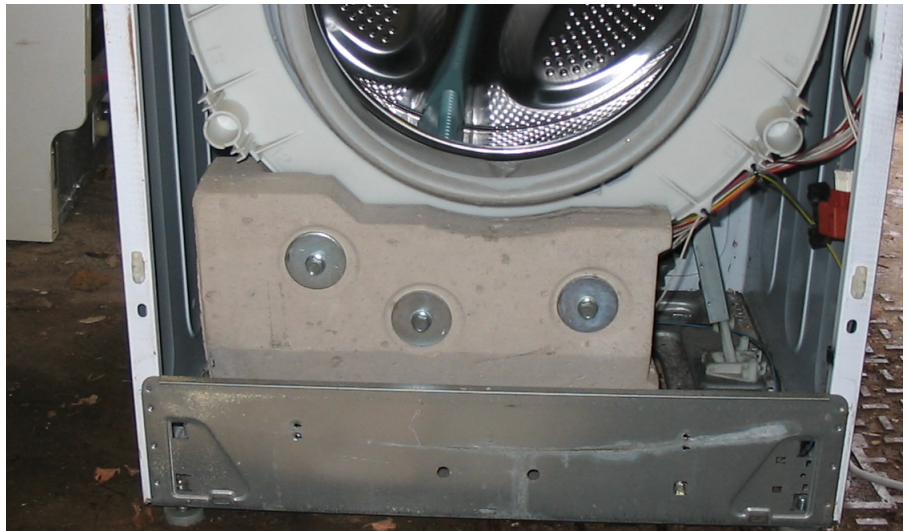

Only two screws hold the rear inspection panel on the machine ... remove them and the panel.

